

REQUEST FOR PROPOSAL (RFP)

Lead Consultancy Services

Project Name : Proposed Building Construction of [B + G + 5P + 30] - Meydan 4
Plot No. : 6117209
Location : Bu Kadra, Meydan, Dubai, U.A.E.
Project Type : Mix-Use (Commercial + Offices +Residential)
Client : Imtiaz Developments

Issued By : **Imtiaz Developments – Design Department**
Level 2, AAAID Building, Opposite Zayed University,
Al Ruwayya 2, near Academic City, Dubai, UAE

Contact Person : **Abdulkader Sakka** - Design Manager
Mobile No.: +971 56 1071553
Tel.: 04-238-1739

Issued Date : 18 December 2025

Revision : 00

Content

Section 01 Introduction

Section 02 Project Brief

Section 03 Overview

Section 04 Scope of Services

Section 05 Proposed Timeline

Section 06 Terms & Conditions

Section 07 Appendices

Section 08 Proposal Submission

Section 01: Introduction

Founded in 1993, Imtiaz Developments has grown with a visionary belief: the future of real estate lies not only in building structures but in creating immersive living experiences that inspire, elevate, and bring communities together. Our mission is rooted in a deep commitment to delivering long-term value to our customers and stakeholders, setting new benchmarks in quality, design, and innovation.


Driven by the discerning tastes of our clientele, we craft architecturally distinguished residences that go beyond fleeting trends—homes that are timeless in appeal and exceptional in function. Our portfolio currently features a range of high-rise luxury residences and thoughtfully planned multi-family communities across Dubai, including landmark developments in Dubai Land, Dubai Islands, Dubai Sports City, and Jumeirah Village Circle.

At Imtiaz Developments, we don't just build homes—we shape lifestyles and communities that reflect the aspirations of modern living.

Section 02: Project Brief

The **Proposed Building Construction for Mix-Use building Commercial + Offices + Residential [B+ G + 5P + 30]** on **Plot No. 6117209 – Meydan 4** set on a generous plot area at Bu Kadra, Dubai, U.A.E. promises a distinctive living experience, seamlessly blending modern architecture with functional spaces. The structure's unique massing and design are expected to create a visually striking perspective, adding to the area's aesthetic appeal.

With its innovative design and focus on wellness, this project is set to become a true landmark, offering a perfect blend of luxury, comfort, and modern living in one of Dubai's most exclusive locations.

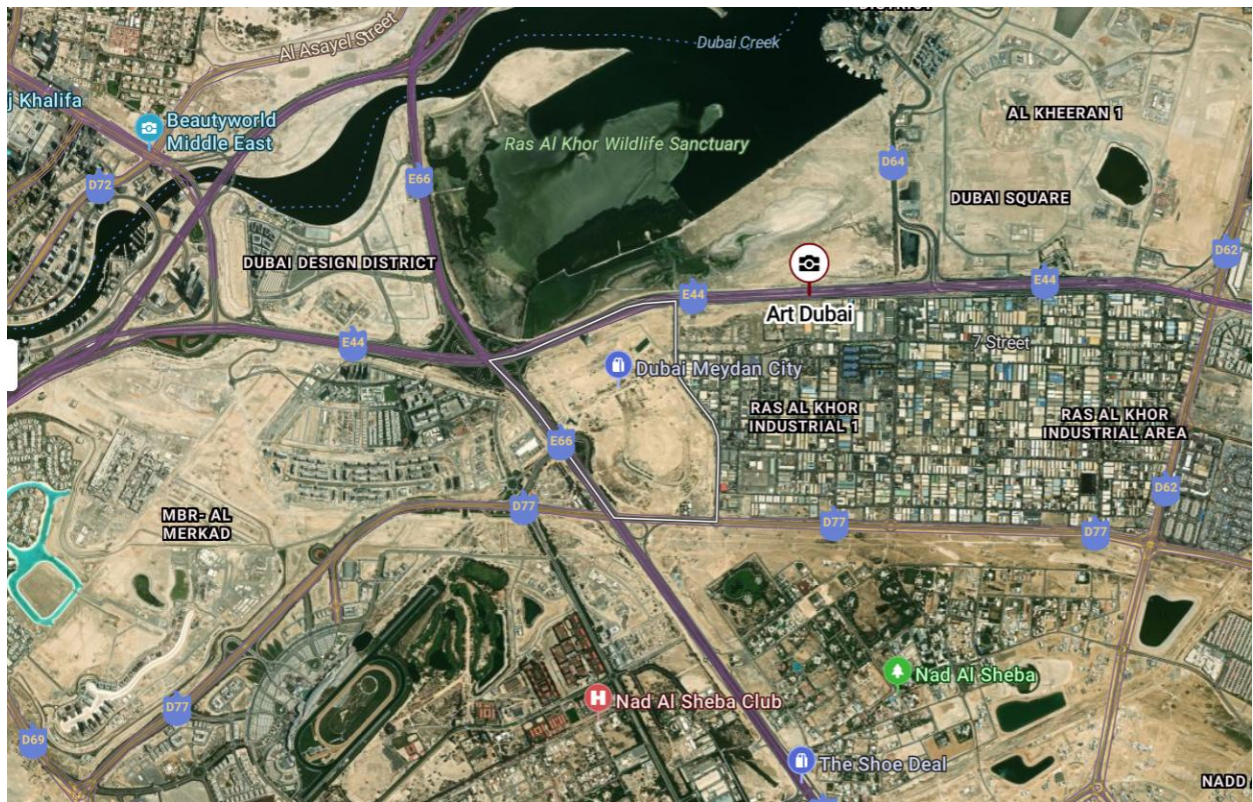

MEYDAN HORIZON



HAP NOT TO SCALE. FOR ILLUSTRATION PURPOSES ONLY.

LEGEND

- AVAILABLE PLOTS
- MIXED USE (RESIDENTIAL/RETAIL/OFFICES/HOSPITALITY)
- PUBLIC FACILITIES
- OPEN SPACES, RECREATION
- PARKS
- UTILITIES
- LAGOON/WATERBODY
- PROMENADE
- RTA FROZEN AREA
- JUMA MOSQUE
- SCHOOL
- NURSERY
- CLINIC
- AMBULANCE
- POLICE POINT
- PLAZA
- FAMILY/NEIGHBORHOOD PARK
- COMMUNITY PARK
- METRO STATION



133

مرجع دائرة الأراضي
DLD Ref Number

بلدية دبي
Dubai Municipality

سلطة الترخيص
Authority




بو كدرة
BU KADRA

المنطقة
Community

6117209

رقم الأرض
Parcel ID

الخارطة الشاملة لإمارة دبي
SITE PLAN - خريطة الموقع

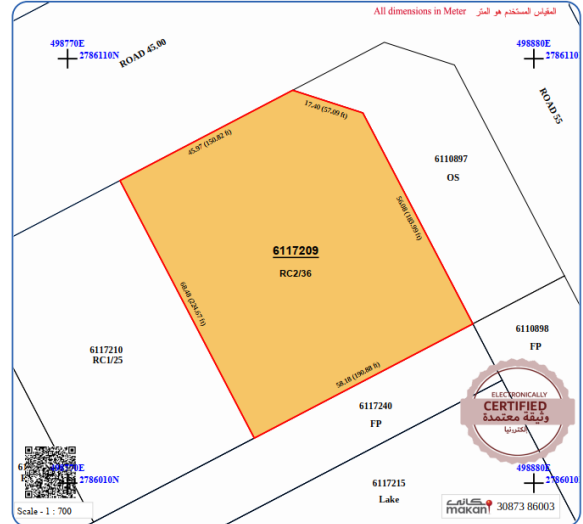

الاستعمال Landuse	RC2/36	تجاري , مكاتب , سكني
الارتفاع Height	RC2/36	سرداب + أرضي + (5) طوابق لقاعدة البرج + (30) طابق ونسبة طابقية = 9.0 ومجموع المساحة الطابقية = 35182.0 متر مربع
المواقف Parking	RC2/36	موقف لكل شقة وموقفين لكل شقة تزيد مساحتها عن 150 متر مربع وموقف لكل 70 متر مربع من الاستعمال التجاري وموقف لكل 50 متر مربع للاستعمال المكثف
الإرتداد Setback	RC2/36	لقاعدة البرج : غير إلزامي , و للبرج : ارتفاع من الجوار ومن منتصف السبيلك وبعد أقصى 7.5 متر وبعد أدنى 3 متر
الملاحظات Remarks	RC2/36	لا يسمح بعمل الاستوديوهات. المساحة الطابقية للتجاري = 1759 متر مربع وللمكاتب = 10555 متر مربع وللشقق = 22868 متر مربع. التجاري في الطابق الأرضي فقط. يجب توفير رواق في الجهة المقابلة للشارع والممشى بعد موافقة ميدان , أقصى ارتفاع للطابق الأرضي لا يزيد عن 5.2 متر. يجب الحصول على موافقة دائرة الطيران المدني بدبي. عدم احتساب مساحات الأروقة المغطاة بزجاج قابل للفتح ضمن المساحة الطابقية المعتمدة للأرضي وعلى أن تستغل كممرات مشاة فقط.

لمنسوب المرجعي = (30) سم من منسوب أي طريق قائم مجاور
بشمل مالك الكافد لكل خطوط الخدمات إن وجدت

هذه المعلومات التخطيطية سارية المفعول ما لم تعارض مع التشريعات التخطيطية المعمول بها وتؤكد من صلاحيتها قبل البيع والشراء يرجى استخدام تطبيق بلدية دبي الموحد (خريشي)
The information is applicable as long as it does not conflict with other approved planning regulations, and should always be reviewed for validity. Upon selling or purchasing please use Dubai Municipality Unified Application (Kharishi).

Prepared by: ansuman

البيانات المعروضة في الخارطة الشاملة الموحدة من قاعدة البيانات الجغرافية المركزية لجميع الأراضي في إمارة دبي - مركز نظم المعلومات الجغرافية في بلدية دبي
Information displayed in Unified Site Plan from central geographical repository for all lands in Dubai - GIS Center in Dubai Municipality

Request Ref: SAPS-05112025-170827

Plot Information	
Plot Location	Bu Kadra, Dubai UAE
Plot Number	6117209
Plot Size	3907.97 SQ.M
FAR	9.0
Total Allowed GFA	35182.0 SQ.M
Residential GFA	22868 SQ.M
Office GFA	10555 SQ.M
Retail GFA	1759 SQ.M
Target Sellable Area GSA	35182.0 SQ.M
Target GSA to GFA	100% +
Building Height	B+G+5P+30
Building use	Commercial + Office + Residential

Design Parameters	
Ground floor Lobby	Maximum height as per DCR
Typical floor height	3.7m (Finish to finish)
Corridor height	2.6m (clear height)
Bathroom height	2.6m (clear height) (50cm MEP area depth)
Glass Proportion	Mostly Glass
Interior Design	Fully furnished apartments with home automation and all appliances included all the retail and offices shall & core
Parking	Follow DCR to achieve accurate parking number
Commercial	All the waterfronts will be F&B and the other normal retail

Residential Unit Mix	Unit Mix %	Net Area (Sqm)	Balcony Area
1 BHK (Type 1)	80	64	15-20% of Net Area
1 BHK (Type 2)		74	15-20% of Net Area
2 BHK with maid	10	105	15-20% of Net Area
3 BHK with Maid	7	140	15-20% of Net Area
4 BHK with Maid	3	180	15-20% of Net Area
Amenities	Lobby area = not less than 100 m ² approx. double height if applicable Clubhouse = not less 100 m ² approx. Gym= not less 100 m ² approx. Steam, Sauna & Ice Bath Infinity Pool Family pool Kids play area Meditation area BBQ area Propose new and unique outdoor / indoor amenities		

Offices Unit	Minimum Area sqm	Maximum Area sqm	Balcony Area
Average size	50	200	15-20% of Net Area
Amenities	Lobby area = not less than 100 m ² approx. double height if applicable Clubhouse = not less 100 m ² approx. Health Club (Gym, Steam, Sauna & Ice Bath) Golf similitar Meditation area Outdoor setting area Propose new and unique outdoor amenities		

Section 03: Overview

3.1 Project Duration

The Project will begin with design stages in Q1 of 2026 with the Consultant working through Preconcept, concept, Schematic and Detailed design with tender package with an ultimate target of handing over the project in Q3 2028. During this period, Imtiaz will require support from the Consultant in the preparation of sales launch materials. Such materials will be provided to third party groups that work on project representations and marketing materials. The list below is an example of tailored architectural material which will be required from the Consultant.

1. 3D models
2. Architectural progress renders
3. Unit type sheets
4. A clean set of floor plans (devoid of grids, callouts, detail targets, room tags, and other technical information), to be used as a reference by the Sales and Marketing teams.
5. Measured area schedules and design efficiencies (BUA/ Sellable, GFA/ Sellable, BUA/ Sellable) are shown both in square meter and square feet.

Please refer to Appendix – Project Design and Development Timeline for details.

The project shall run in parallel with the approved program, ideally developing the design of the tower, podium & ground in coordination with both plots RA to maintain the same design.

3.2 Procurement Route

It is proposed that the construction of the Project will be carried out by one Main Contractor under a direct contract with the Client. However, the following design packages will need to be prepared and issued by the Consultant to support fast track approach.

1. Soil Investigation Works
2. Enabling Works - Fencing, Hoarding and Site Office construction
3. Enabling Works – Shoring, Bulk Excavation and Dewatering system
4. Enabling Works – Piling
5. Substructure Work – Raft, including underground MEP Works.

Section 04: Scope of Services

4.1 Main Scope

The scope of work for the design and engineering until obtaining Authority Approvals shall cover the Architectural Design, Structural Design and MEP Design with stages as follows:

- a. Pre Concept Design
- b. Concept Design
- b. Schematic Design
- c. 50% Detailed Design and Enabling Work
- d. 100% Detailed Design
- e. Issued For Tender
- F. Issued for Construction (IFC)

Notes:

- All the deliverables must be following the list from Appendix 03.
- Participate and contribute as a design team member to the successful undertaking of the plot.
- Develop a clear understanding of the Employer's needs.
- Develop & validate the ID design conjunction with all other trades, consultation with the Employer, and other consultants appointed by the Employer.
- The consultant is to liaise and coordinate with all Speciality services consultants and shall incorporate the requirements in his design and produce overall design and drawings.
- Coordinate the services being provided by the lead consultant and recognise the architectural and other services provisions and designs associated with the project.
- Provide presentation reports to Employer at all stages of the design works which are to include, drawing packages, schedules and "specification documents".

Lead Consultant Design Services to be included:		
SN	DESCRIPTION	REMARKS
1	Architecture Design	Complete Design Services by Lead Consultant
2	Structural Engineering	
3	Mechanical, Electrical and Plumbing (MEP) Engineering Design	
4	Tender Documents and Contract Documents	
5	Issued for Construction (IFC)	
6	Liaison with Authority for Design Approval, Building Permit and NOC's	

B.1.B Construction Supervision (Optional).

Supervision to be mentioned as provisional.

4.2 Scope of Services

The RFP seeks a complete Design Consultancy Services proposal from an overall consultant encompassing Architectural, complete Engineering, including all specialist consultants required for the project as anticipated in the list below. Collectively, these are referred to as the "Services" in this document. The overall consultant who will be in charge of managing the project from start to completion with all other consultants reporting under them will be referred to in this document as the "Consultant".

The Consultant shall be responsible for all design and coordination amongst the other design teams that will be involved in the Project. The scope encompasses the design and documentation of abovementioned Services from Pre-Concept through all the design phases, approvals, submissions, to the completion of construction including site supervision duties. The Consultant shall provide a full team of design professionals except for some consultants that will be retained by the Client directly. Refer to item 2.2 for details.

The Consultant will directly retain the services of all engineering consultants and any specialist firms required by the scope and all must be qualified and licensed to work in the United Arab Emirates and Dubai in particular and eligible to submit documentation for approvals with all of the authorities having jurisdiction over the Project.

The Consultant shall obtain the Client's approval on the format of submission where it is optional. All drawings shall be made using AutoCAD and submitted as bound copies both in DWG and in PDF formats. Project Programmes shall be submitted utilizing Primavera software.

4.3 Project Consultants

Unless otherwise stated, the Consultant's scope covers coordinated and comprehensive Schematic, Design Development, Tender (including tender documentation), contract documentation, construction documentation and construction supervision services (proposal only) (including performing the role of the Architect and the Engineer under the Construction Contracts) in relation to the disciplines described below to ensure that the Project as constructed is fit for the purposes intended and to fully comply to all relevant Authorities requirements for the issuance of Certificate of Fitness and Certificate of Occupancy. The intent of this RFP is to give only a general overview of what is required from the full design team, your proposal must outline in detail the full scope of each subconsultant within your team in your submission.

1. Architecture with Architect-Of-Record (AOR), fully recognized and legally allowed to practice and present the project to the Authority having jurisdiction.
2. Civil and Structural engineering. Early discussion and involvement of PT specialist for structure design should be arranged by lead consultant to ensure accurate design parameters are considered throughout critical design stages (if PT slab design is proposed). The same applies to other structural components that require early information such as steel-framed staircases, elevation features, canopies and the like.
3. Mechanical, Electrical, Plumbing, Fire Protection and Fire Fighting and all other ancillary MEP services (MEP). Early identification/ scheduling of lighting and power quantities will be required.
4. Infrastructure and utilities design (within the Project site)
5. Security, access control, surveillance (CCTV), audio/visual, information technology, telecommunications and low voltage design.
6. Environmental consultancy to comply with local Green Building Regulations and LEED, including the preparation of Environmental Impact Assessment Report (if applicable).
7. Vertical Transportation (VT) by independent VT consultants. The quantity of lifts must adhere to minimum Authority requirements.
8. Façade access and exterior building maintenance, including glass panel replacement considerations.
9. Fire, Life and Safety (FLS) by FLS consultants that will assess the building's occupancy loads, compliance to the authority's requirements on fire ratings, separation of exits, travel distances, dead ends, fire truck access and other similar requirements.
10. Acoustic and vibration studies by specialists (if necessary).
11. Façade lighting by independent façade lighting consultants.
12. Full and comprehensive signage & wayfinding design pack covering both internal and external areas of the Project including street and outdoor public facilities including wall graphics in parking and amenities areas to be done by an independent signage consultant.
13. Waste management, (if applicable).
14. Stack effect / pressurization studies (if applicable).
15. Traffic and parking consultant who will conduct Traffic Impact Studies (TIS) and obtain RTA Approvals.
16. Aeronautical survey consultant (if necessary) .
17. Wind studies (if necessary)
18. Land/ topographic survey services provided by client.
19. Geotechnical investigations including shear wave velocity test provided by client.
20. Home automation (Basic- entry, lights and AC)

The list is not deemed to be comprehensive; the Consultant shall add to their proposal any other sub consultants they believe are required for the full execution of the project and for the successful completion of all required masterplan approvals, building permits or other agencies having jurisdiction. The additional firms and their fees will be disclosed on their Bid Submission form. The Consultant shall issue PDF format files, both individual and combined along with CAD files at end of each stage and all CAD drawings files format will have all the Xref layers bound. As part of the technical response to this RFP, the Consultant shall provide a list of deliverables and drawings proposed for each discipline at each stage. This document will be subject to Ellington's review and approval.

4.4 Consultants retained by the Client

The Client has their own review & approvals team as well as their own construction procurement teams responsible for tendering the work. The Client may also decide to engage third party engineers/ designers to carry out peer reviews. In such event, the consultant is expected to engage and coordinate directly with these Client-appointed consultants and perform any requested design changes by the latter.

4.5 Project Meetings

Project meeting shall be held initially on a weekly basis with the Client's Design Development teams and the Consultant's Project Director along with the sub-consultant principals as required. Minutes of the meeting shall be taken by the Consultant and circulated within 2 business days. The Consultant shall appoint a single person (i.e., Design Project Manager) as a point-of-contact for the Client on any and all matters. It is the Consultant's responsibility to manage and keep all sub-consultants abreast of the latest developments in the project.

4.6 Mode of Communication

All forms of communications between the Client and Consultant (including sub-consultants) shall be in English. This includes English texts in drawings, schedules, reports and specifications that will be submitted to the Client. The Design Project Manager and the sub-consultant principals or their designated representatives should be fluent in English both in speaking and writing to ensure that the information being exchanged between the Client and the consultants are accurate, well understood and articulated. All major submissions from the sub-consultants shall be coursed through the main consultant only. Direct submissions shall not be accepted. This is to ensure that the main consultant has an overview of the packages prepared by the sub-consultants and a proper QA/ QC procedure has been conducted prior to submitting to the Client.

4.7 Construction Methodology

The Client will construct the project using common fast track methods and utilizing design as it is completed, therefore separate documentation packages will be required at various stages to facilitate approvals and tender documents sets. The Client expects the Consultant to manage the sequence of their work and their document packages for approvals to expedite a rapid deployment of construction activities. These stages will be organized into at least the following sections.

1. Site Mobilization
2. Ground remediation (if necessary)
3. Early Works: Excavation, Shoring & Foundations
4. Main Construction Works (To include full ID fit-out works)
5. Snagging/ de-snagging of the completed building prior to apartments handover

4.8 Design Scope by Stages

Construction Documentation Phase (All Disciplines)

Upon the Client's approval of the Detailed Design package and Final design approvals from Authorities, the Consultant shall compile and coordinate all drawings, documents, specifications, quantities, manuals, to prepare final "Issued for Construction" (IFC) documents. Please refer to Appendix – Project Design and Development Timeline for details.

Section 05: Proposed Timeline

The Consultant provided proposal must be aligned with the below project program.

SN	MILESTONES	TIMELINE
1	Preparing preconcept Design package	1 week
2	Concept Design package	4 weeks
3	PD (Preliminary Design) Approval	2 weeks
4	Schematic Design	4 weeks
5	Detailed Design	6-7 weeks
6	IFT Package and Building Permit (BP)	4-6 weeks
7	Issued for Construction (IFC)	1 week

Section 06: Terms & Agreement

1. Confidentiality: Information provided by the consultant (as the second party) will be treated as confidential.
2. Expenses: The consultant is responsible for their own expenses related to preparing and submitting proposals.
3. Right to Reject Proposals: The client (as the first party) reserves the right to reject any or all proposals.

Section 07: Appendices

Please refer to the attached Appendices for the Design Stage timelines, Consultancy services checklist, Architecture, Civil and Structural Design deliverables Checklist.

Section 08: Proposal Submission

8.1 Technical & Commercial Proposals

We seek a fee proposal from your company for the Design services as listed in this RFP.

1. Total Fees for All Scope & breakdown of fees for each Design Stage
2. Estimate of all Expenses & Disbursements
3. Team Totals per Phase and Totals per Consultant
4. Sample drawing package for quality
5. Sample visuals for quality
6. Sample specification for quality
7. CV of project team members
8. Portfolio of relevant projects
9. Draft project programme

Identify all applicable taxes, duties, royalties or any additional fees, charge you expect to be compensated for during this project. The technical proposal shall also include:

1. Relevant project experience
2. Team structure and organization chart
3. Subconsultant portfolios (for Imtiaz approval)
4. Licenses and insurances
5. Programme

8.2 Submission

Please direct your proposal submission to details shown below. Submissions may be posted by email (not to exceed 10MB per email) on or before the deadline and hard copies must be delivered via courier no later than 3 days thereafter.

The deadline for submissions is on **29 December 2025**, and we anticipate announcing the selected Lead Consultant shortly thereafter.

Ms. Irene Nale

Imtiaz Development LLC,

Email: i.nale@imtiaz.ae

Tel: 04-238-1739

Thank you again for your interest in partnering with us on this project.

With Best Regards,

Abdulkader Sakka

Design Manager